

This product is available through:

JRT Associates

5 Nepperhan Avenue, Suite 2B
Elmsford, NY 10523
800-221-0111

FLUKE®

Biomedical

451B

Ion Chamber Survey Meter with Beta Slide

Technical Data



The 451B state-of-the-art ion chamber survey meter is a handheld battery operated unit designed for use in both rugged and normal environments. The 451B includes a sliding beta shield to serve as an equilibrium thickness for photon measurements and enables beta discrimination. The 451B has auto-ranging and measure radiation rate and accumulated dose from various radiation sources (beta, x-ray, gamma). The ion chamber detector allows for a fast response time to radiation from leakage, scatter beams, and pinholes. Additionally, the low-noise chamber bias supply provides for fast background-settling time.

The digital display features an analog bar graph, 2.5 digital readout, low battery, and freeze (peak hold) mode indicators, and an automatic backlight function. User controls consist of an ON/OFF button and a MODE button. The case is constructed of lightweight, high strength materials and is sealed against moisture.

The RS-232 interface can be connected directly to a computer for use with the Excel add-in for Windows (451EXL), enhancing the functionality of the instrument. This software allows for data retrieval, user parameter selection and provides a virtual instrument display with audible (requires sound card) and visual alarm indication.

Key features

- Measures skin dose (slide open) and deep dose (slide closed)
- High sensitivity measurement of rate and dose simultaneously, with the capability to record peak rate
- Auto-ranging and auto-zeroing
- RS-232 communications interface with optional Windows-based Excel add-in for data logging
- Ergonomic, anti-fatigue handle with replaceable grip, wrist strap and tripod mount
- Programmable flashing LCD display and audible alarm
- Easily-accessible battery door (operated by two 9-volt alkaline batteries) on the outside of the bottom case
- Available with dose equivalent energy response (SI units)




	451B
Detector	Ion chamber
End users	<ul style="list-style-type: none"> • x-ray manufacturers • state inspectors • government agencies • police and fire departments • emergency response and HAZMAT teams • nuclear medicine labs • hospital radiation safety officers • nuclear power workers
Radiation detected	beta, x-ray, gamma

Specifications

Radiation detected	Alpha	> 7.5 MeV
	Beta	> 100 keV
	Gamma	> 7 keV
Operating ranges, response time	0 mR/h to 5 mR/h (8 sec) 0 mR/h to 50 mR/h (2.5 sec) 0 mR/h to 500 mR/h (2 sec) 0 R/h to 5 R/h (2 sec) 0 R/h to 50 R/h (2 sec)	
Accuracy	Within 10 % of readings between 10 % and 100 % of full scale indication on any range, exclusive of energy response	
Detector	Chamber (cc volume air ionization)	349 cc
	Chamber wall (phenolic)	246 mg/cm ²
	Chamber window (mylar)	6.6 mg/cm ²
	Beta slide	440 mg/cm ²
Automatic features	Auto-zeroing, auto-ranging, and auto-backlight	
Power requirements	Two 9 V alkaline, 200 hours operation	
Warm-up time	One minute	
Display LCD analog/digital with backlight	Analog	100 element bar graph 6.4 cm long. Bar graph is divided into 5 major segments, each labeled with the appropriate value for the range of the instrument
	Digital	2.5 digit display is followed by a significant zero digit depending on the operating range of the instrument. The units of measurement are indicated on the display at all times. Digits are 6.4 mm (0.25 in) high. Low battery and freeze indicators are also provided on the display
Modes	Integrate mode	Operates continuously 30 seconds after the instrument has been turned on. Integration is performed even if the instrument is displaying in mR/h or R/h
	Freeze mode	Will place a tick mark on the bar graph display to hold on the peak displayed value. The unit will continue to read and display current radiation values
Environmental	Temperature range	-4 °F to 158 °F
	Relative humidity	0 % to 100 % (at 140 °F)
	Geotopism	< 1 %
Typical energy dependence	¹⁶ Nitrogen gamma rays are 110 % to 120 % of indicated readings as determined at the University of Lowell	
Dimensions (WxDxH)	10 cm x 20 cm x 15 cm (4 in x 8 in x 6 in)	
Weight	1.11 kg (2.5 lb)	

451B typical energy dependence

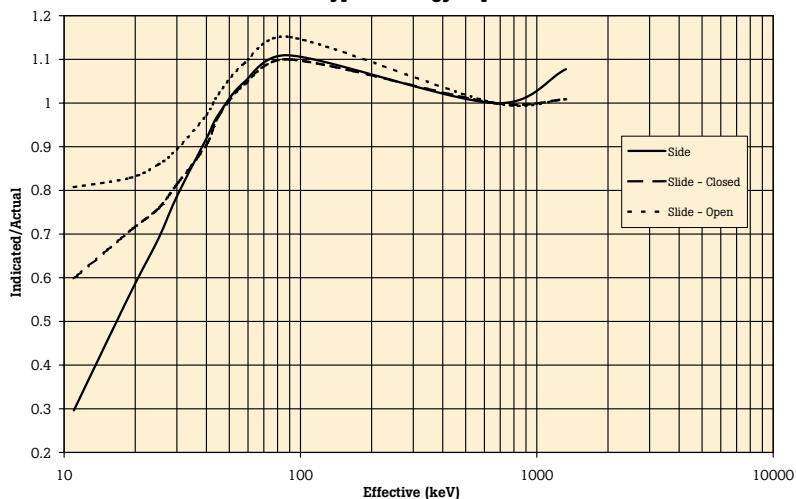

Ordering Information

Models

451B-RYR Ion Chamber Survey Meter with Beta Slide and standard chamber

451B-DE-SI-RYR Ion Chamber Survey Meter with Beta Slide and dose equivalent chamber

Optional accessories

451EXL 451 Assistant for Excel, includes RS-232 interface cable

190HPS Single Unit Carrying Case

62-103 Check Source, ¹³⁷Cs, 10 µCi. Flat disc, 1-inch diameter

450UCS Check Source, ²³⁸Uranium, 0.064 µCi, impregnated, 2 in x 2 in yellow card

This product is available through:

JRT Associates 800-221-0111